

STATIC JET 55

Ionisation gun with flat jet nozzle



Key Facts

- ✓ **Manual, non-contact cleaning** with great effective depth
- ✓ **Integrated ionisation** to neutralise electrostatic surface charges
- ✓ **Ergonomic and robust design**
- ✓ **Compressed air intensity** adjustable by the operator

Product Description


The SAJ55 combines highly effective electrostatic discharge with compressed air cleaning. High performance and reliability characterise our ionisation gun.

- Contactless cleaning protects the material surface
- Safe to the touch for users
- Media is fed in from below
- Mounting connectors without tools

Technical Data

	SAJ55
Version	Standard
Type of nozzle	JET-AIR flat jet nozzle
Operating air pressure for cleaning system (recommended)	1.0 – 6.0 bar
Operating air pressure for cleaning system (min. – max.)	max: 6.0 bar
Type Ionisation	1 × SPM 55 fully integrated
Ambient temperature (min. – max.)	5 – 50 °C
Weight	0.83 kg
Cable length (standard)	3 / 5 / 7 / 10 m
Conveying direction (uni-/bi-/multidirectional)	multidirectional

Technical Drawings

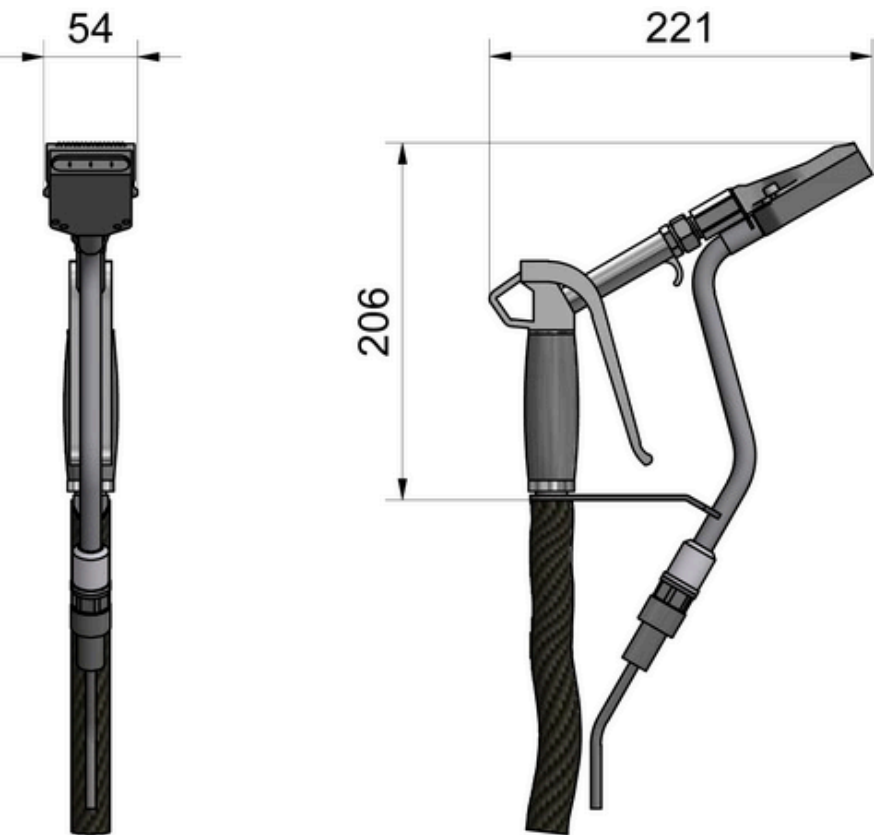


Air Consumption

NI/min at operating pressure					
	1.0 bar	2.0 bar	3.0 bar	4.0 bar	5.0 bar
SAJ55	170	270	370	470	570

TECHNOLOGY

STATIK-AIR® POINT

STATIK-AIR® POINT is convincing where precise discharge is required. Learn more about the powerful technology behind it.

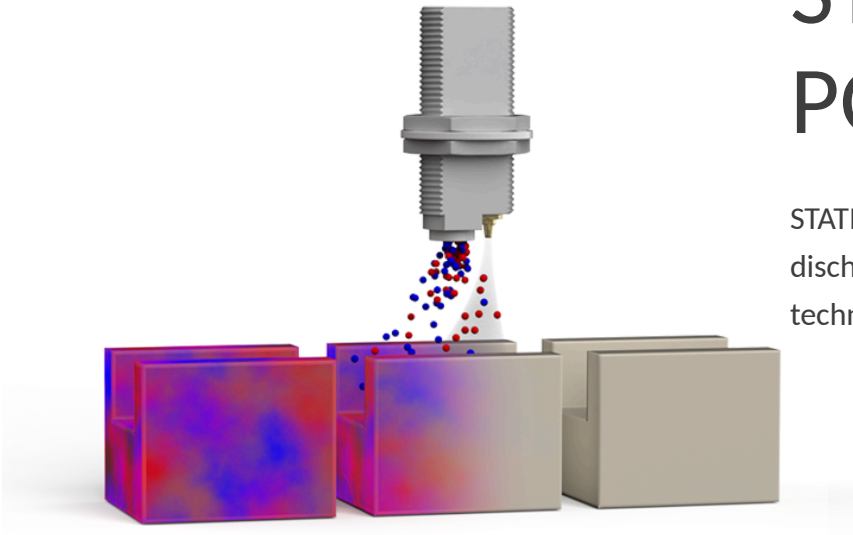

Related Products



POWER UNIT 60

Powerful HV power supply
for KIST + ESCHERICH
ionisation systems



HV-DISTRIBUTOR

Distributors for TRUE ION
ionisation systems



ION CHECK

Function tester for testing
ionisation systems