

TAIFUN-CLEAN® COMPACT 110

Surface cleaning system for 3D components with ring ioniser, without suction

TCC110



Key Facts

- ✓ **Compact cleaning system** for integrating into new and existing plants
- ✓ **Non-contact cleaning with pulsating compressed air**
- ✓ **Great cleaning depth** via special **compressed air nozzles with beam bundling**
- ✓ **For structured components** and complex component geometries

Product Description

TAIFUN-CLEAN COMPACT® 110 is perfectly adapted to the TAIFUN-CLEAN® rotating nozzle due to its round design. The symmetrical arrangement of the emitter tips creates uniform ion clouds.


- We offer several TAIFUN-CLEAN® COMPACT modules to facilitate the adaptation to complex shaped components
- Contactless cleaning protects the material surface
- Integrated ionisation to neutralise electrostatic surface charges
- Ionisation system contact-voltage proof for users
- Stable pressure-independent rev speed thanks to its patented, integrated control
- Option: Rev speed monitoring
- Additional variants available: CR, ESD

Technical Data


	TCC110	TCC110CR	TCC110ESD
	Standard	Cleanroom optimised	ESD applications
Working width	100 mm	100 mm	100 mm
Working distance (min. – max.)	20 - 50 mm	20 - 50 mm	20 - 50 mm
Rotating nozzle type	TCR-7A-070	TCR-7A-070-VA	TCR-7A-070
Operating air pressure for cleaning system (recommended)	1.5 - 3.5 bar	1.5 - 3.5 bar	1.5 - 3.5 bar
Operating air pressure for cleaning system (min. – max.)	1.0 - 5.0 bar	1.0 - 5.0 bar	1.0 - 5.0 bar
Type compressed air connection for the cleaning system	Ø 10 mm	Ø 10 mm	Ø 10 mm
Type Ionisation	1x SR55-112	1x SR55-112	1× SIP-INT
Ambient temperature (min. – max.)	5 – 50 °C	5 – 50 °C	5 – 50 °C
Weight	1.1 kg	1.1 kg	1.3 kg
Conveying direction (uni-/bi-/multidirectional)	multidirectional	multidirectional	multidirectional

Technical Drawings

TCC110

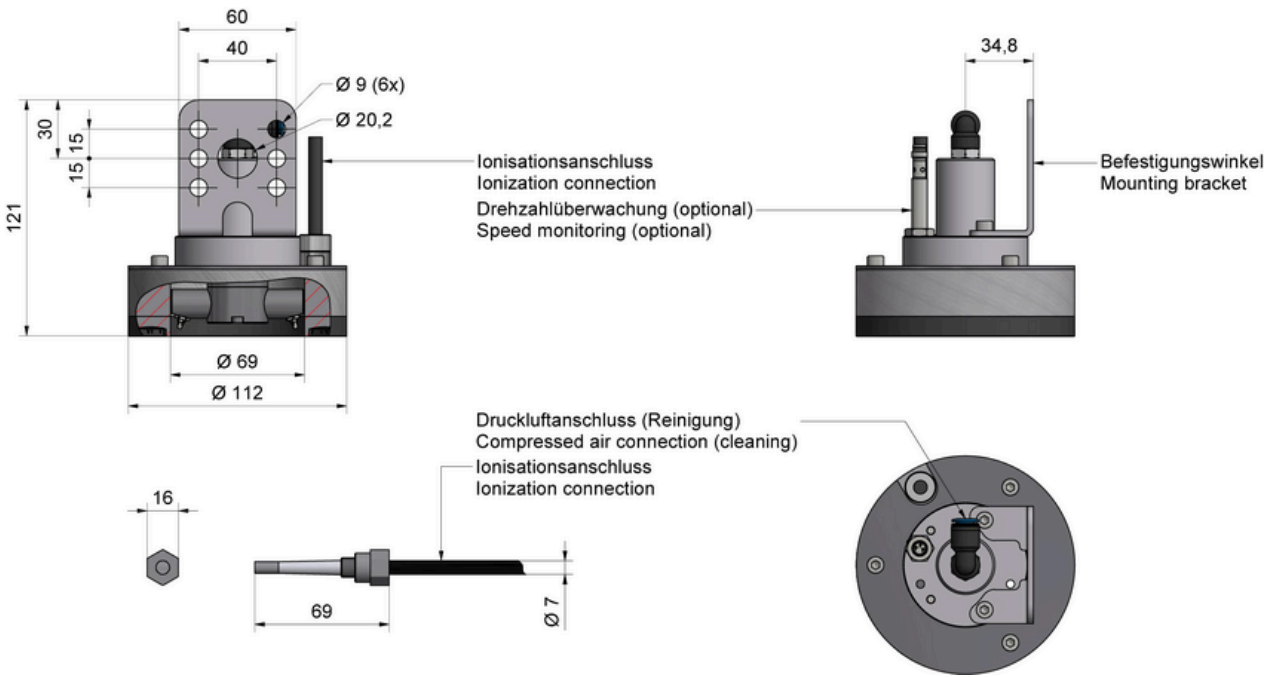


TCC110ESD

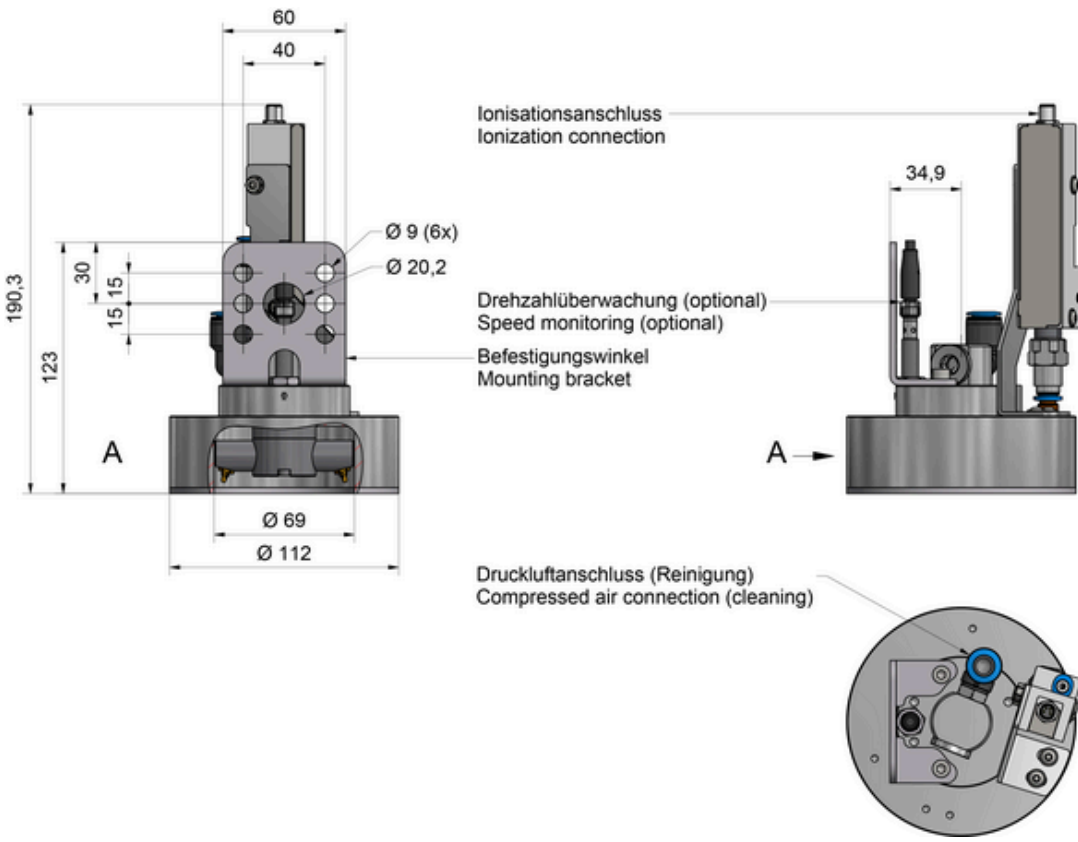

Air Consumption

	NI/min at operating pressure		
	1.0 bar	2.0 bar	3.5 bar
TCC110	140	220	340

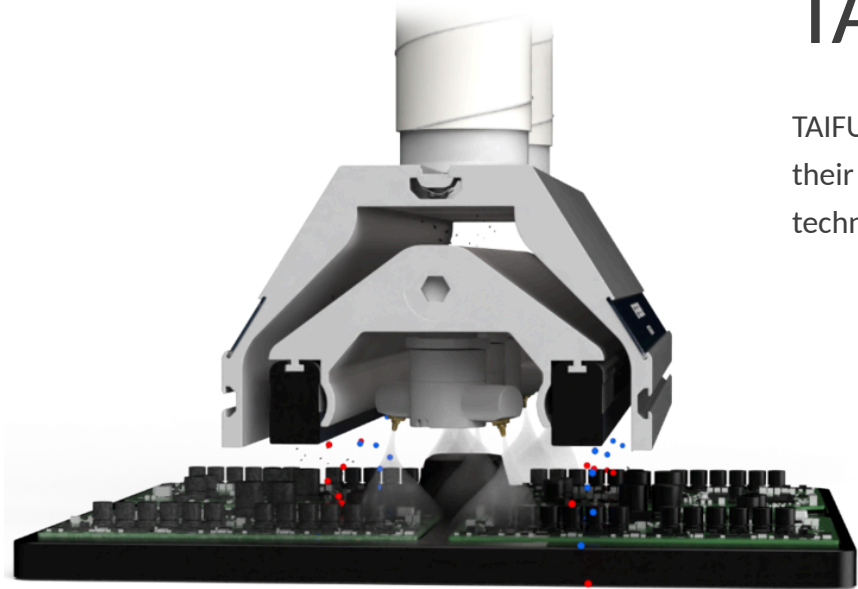

TECHNOLOGY

TAIFUN-CLEAN®

TAIFUN-CLEAN® begins where others have reached their limits. Would you like to learn more about the technology behind our product?

Related Products



POWER UNIT 60

Powerful HV power supply
for KIST + ESCHERICH
ionisation systems



HV-DISTRIBUTOR

Distributors for TRUE ION
ionisation systems



ION CHECK

Function tester for testing
ionisation systems